



TEST REPORT

报告编号 : WTS18S02103492-2B
Reference No. :
申请商 : 沈阳新松医疗科技股份有限公司
Applicant : SysMed (China) Co.,Ltd.
地址 : 辽宁省沈阳市浑南新区文溯街 17 号 11-2-3
Address : 11-2-3 No.17 Wensu Street, Hunnan New District, Shenyang, Liaoning Province, China
制造商 : 珠海市古鑫电子科技有限公司
Manufacturer : Zhuhai Gushine Electronic Technology Co.,Ltd.
产品名称 : 锂离子可充电电池
Name of product : Lithium ion Rechargeable Battery
产品型号 : MZ724LI
Model :
依据标准 : MH/T 1020-2013 锂电池航空运输规范
Standards : Air transport regulation for Lithium ion battery
 *MH/T 1052-2013 航空运输锂电池测试规范
 *Air transport lithium ion battery testing regulation
 *联合国《关于危险货物运输的建议书 规章范本》(第 19 修订版) 特殊规定 188 条
 *UNITED NATIONS "Recommendation on the TRANSPORT OF DANGEROUS GOODS" Model Regulations (19th revised edition) special provisions 188
样品接受日期 : 2018-02-25
Date of Receipt sample :
测试日期 : 2018-02-26
Date of Test :
发布日期 : 2018-02-27
Date of Issue :
测试结果 : 所提供的样品符合以上标准
Test Result : The submitted samples comply with the above standards

Prepared By:

深圳市沃特测试技术有限公司

Waltek Services (Shenzhen) Co., Ltd.

地址: 中国广东深圳宝安区松岗街道白马路富康泰厂房一楼

Address: 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen Guangdong, China

电话 Tel: +86-755-83551033

传真 Fax: +86-755-83552400

编辑 Compiled by:

批准 Approved by:

李文君 Sandy Li/工程师 Project Engineer



钟明 Philo Zhong /经理 Manager



| 产品的基本信息 General product information: | |
|---|--|
| 产品名称和型号 Sample name and model | 锂离子可充电电池 MZ724LI Lithium ion Rechargeable Battery MZ724LI |
| 额定值 Ratings | 15.12V 6000mAh 90.72Wh |
| 电池商标 Trade mark | / |
| 设备名称和型号 Equipment name and model | 便携式氧气机 M100 Portable Oxygen Concentrator M100 |
| 设备商标 Trade mark of equipment | / |
| 包装件说明 Instructions of Package | <p>包装件外包装为 A=A 纸箱, (577×315×414) mm, 总重 12.8kg; 内含 4 个锂离子可充电电池 锂离子可充电电池总净重 1.9kg, 锂离子可充电电池和便携式氧气机 M100 一起运输, 内包为装彩色纸盒, 内装电池套有 PE 塑料袋</p> <p>Out package is a rectangle A=A carton, Dimension (577×315×414) mm, Gross weight 12.8kg, containing 4 Pcs of Lithium ion Rechargeable Battery, total net weight of battery is 1.9kg, Lithium ion Rechargeable Battery transport with Portable Oxygen Concentrator M100, inner package material is colour box, battery covered by PE plastic bags.</p> |
| 检测项目 Test items | 1.2m 跌落测试 1.2m Drop test |
| 检测结论 Test conclusion | <p>被测包装件能够承受1.2m跌落测试试验, 其内装的电池没有破损, 没有产生导致内部电池的直接接触的移动及内容物的泄漏</p> <p>The tested package is capable of withstanding a 1.2m drop test in any orientation without damage to cells or batteries contained therein, without shifting of the contents so as to allow battery to battery or cell to cell contact and without release of contents.</p> |



1.2m 跌落测试 1.2m drop test:

包装件从 1.2m 的高度自由跌落至冲击板上，应对包装件的重点部位进行测试,如包装箱的底部、顶部、长侧面、短侧面、棱和角等 6 个方向各跌落一次。除平面着地的跌落外，包装件中心所做垂线应通过撞击点。如果在一次跌落测试中可有一种以上的可选部位，应选择最易使包装件损坏的跌落部位。

Package should be free dropped from a height of 1.2 m onto a strike plate. The package is dropped in a key point ,such as bottom、top、long side、short side、edge、angle ,six orientations should be dropped once. Except drop for flat side, packaging center perpendicular line should be done through the point of impact. If there is more than one optional parts during a drop testing, it should choose the parts which most easily damaged to packaging.

| 序号 No. | 测试依据 Test according to | 跌落方向 Drop position | 结论 Result | 备注 Remark |
|-----------|--|-----------------------|--------------|--------------|
| 1 | MH/T 1020-2013 锂电池航空运输规范 Air transport regulation for Lithium ion battery *MH/T 1052-2013 航空运输锂电池测试规范 *Air transport lithium ion battery testing regulation *联合国《关于危险货物运输的建议书 规章范本》（第 19 修订版）特殊规定 188 条 *UNITED NATIONS "Recommendation on the TRANSPORT OF DANGEROUS GOODS" Model Regulations (19th revised edition) special provisions 188 | 上面跌落 Top | 合格 Pass | |
| 2 | | 底面跌落 Bottom | 合格 Pass | |
| 3 | | 侧面跌落 Side | 合格 Pass | |
| 4 | | 前面跌落 Front | 合格 Pass | |
| 5 | | 棱跌落 Edge | 合格 Pass | |
| 6 | | 角跌落 Angle | 合格 Pass | |

备注 Remark:

包装件不出现以下情况，则满足试验要求:

If package does not appear follow condition, the test meet the requirements:

A- 内装电芯或电池破损或泄漏 Damaged or leakage for built-in cells or batteries

B- 内装物移动，使电池之间（或电芯之间）接触或发生短路； Shift for contents, batteries (cells) have contact directly or short-circuit

C- 内装物外漏 Contents out-leakage

环境条件 Environment conditions:


温度 Temperature: (20±5) °C, 湿度 Humidity: 40%-70%



包装件图片 Photo of Package:



电池图片 Photo of Battery:

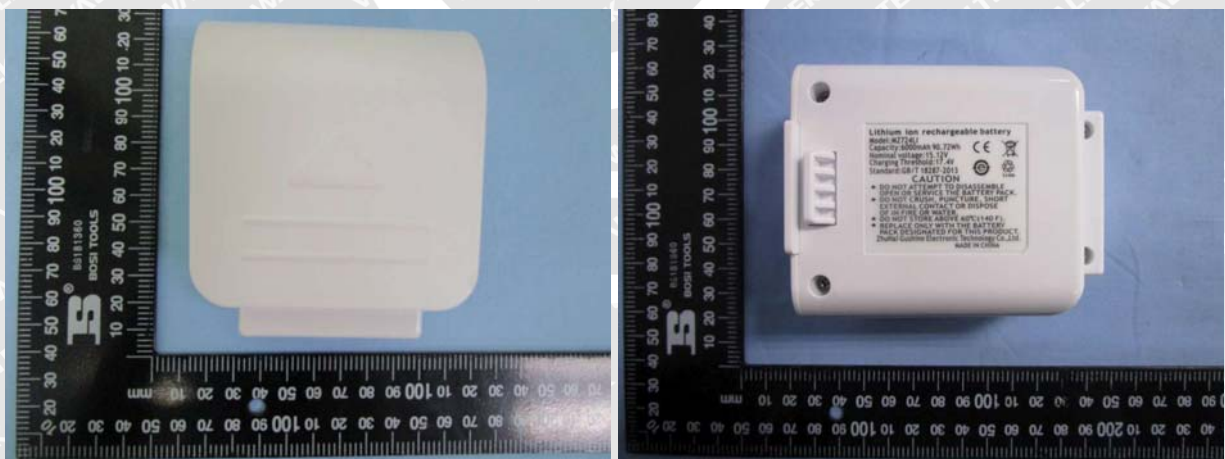

==== 报告结束 End of Report =====